



TP FILTER NOZZLES




TP filter nozzles have been designed for optimum performance in water filtration and solid separation during back-washing processes. The dome-shaped nozzles c/w threaded base caps are carefully designed for durability, strength, toughness and to achieve broad and uniform flow pattern during filtration and back-washing processes.

- Material of construction : Polypropylene (PP)
- Width of nozzle slots : 0.5mm
- Maximum operating temperature : 90°C
- Corrosion-resistant against most chemical e.g.
sulphuric acid (10%), Ozone (50ppm),
hydrochloric acid (10%), caustic soda (50%),
methanol (50%), ammonia (10%).
- Tightening torque on nozzle stem shall not exceed 5 Nm

Hand tightening to avoid over tightening

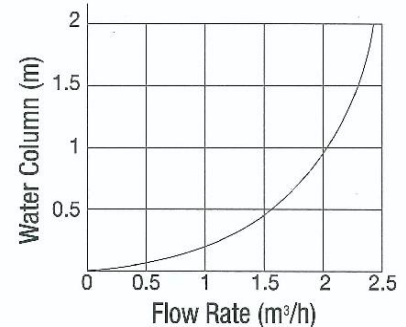

Flow through each filter nozzle with respect to water height above nozzle.

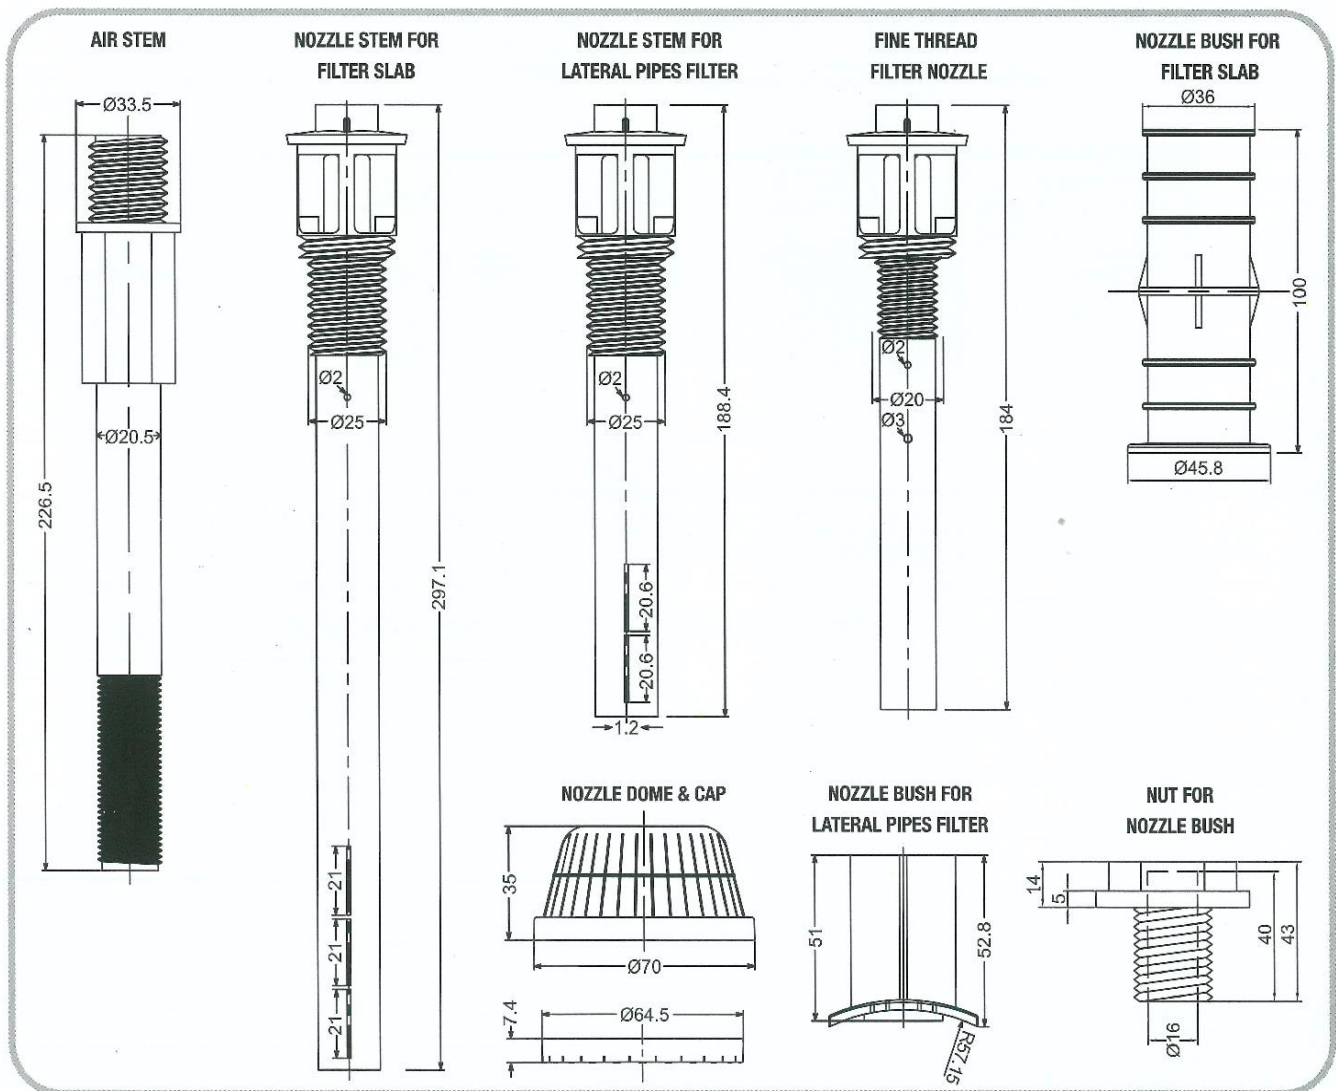

SOLVE FLOW SDN BHD (213943-K)

31-2, Jalan Radin Anum Dua, Bandar Baru Sri Petaling, 57000 Kuala Lumpur, West Malaysia

Tel : +603-9057 2684 / +6016-666 9978

Email : enquiry@solveflow.com.my

Fax : +603-9057 2699

Website : www.solveflow.com.my